

HIGH VOLTAGE DETECTOR



285 HD High Voltage Detector is primary used to detect the presence of an alternating field.


It shows identification of AC voltages. 285 HD has a large LCD that is housed in an ABS enclosure. 285 HD can be attached to the cable by a large metal clip and can be secured with a cable tie. The high voltage detector senses the radiated magnetic field surrounding the cable and shows a LIVE warning sign on the LCD.

FEATURES

- Three different ranges of identification of AC voltage :
 - 285-A HD : 3~7 kV
 - 285-B HD : 6.6~11 kV
 - 285-C HD : 10~22 kV
- The LCD will "flash continuously" for high voltage testing.
- Physical contact with electrical conductors is not necessary when testing for live wires.
- The 285 HD senses the radiated field that surrounds live conductors.
- Radiated field strength increases with voltage and decreases quickly with distance.
- Large LCD.
- Continuous monitoring.
- Easy to install.
- No batteries required.
- Weight : Approx. 80g.
- Meets EN 61326-1
EN 55011
EN 61000-3
EN 61000-4

APPLICATION

- Identify and check live cables.
- Check live wires at high voltage.

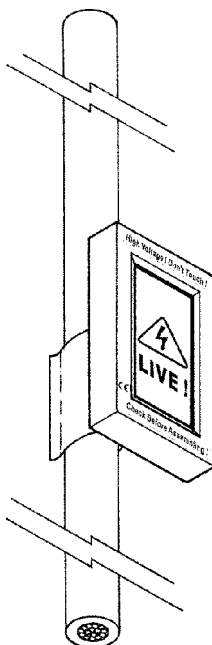

Authorized Distributor of SEW in China

Shanghai beihan Electronics Co.,Ltd

TEL: 86-21-63340274 63340254 FAX: 86-21-63340789

http://www.beha.com.cn

e-mail: info@beha.com.cn