

# LampTester

## HDT LampTester


### HDT LampTester

- Handy test instrument for swift fault finding in all gas-filled low pressure and high pressure discharge lamps
- For fluorescent lamps the test is carried out without disassembling the lamps
- Built-in continuity tester for fuses, coils, resistors, capacitors, etc. with optic and acoustic display
- Integrated single-pole voltage tester
- The test procedure consists of the comparison between new item and UUT
- Optic and acoustic display for continuity and voltage

### Technical Data

Voltage	approx. 3 kV
Test Frequency	approx. 160 kHz
Field Strength	approx 100 $\mu\text{V}/\text{m}$
Continuity Range	0...5 M $\Omega$
Test Current	< 7 $\mu\text{A}$
Voltage Indication	LED, buzzer
Measurement Category	CAT II / 300 V
Pollution Degree	2
Safety complying with	EN 61010
Power Supply	9V, IEC 6LR61

unique

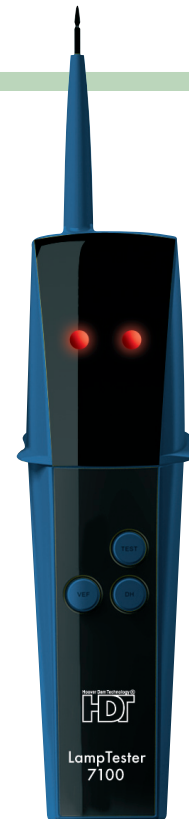

### Scope of Supply

- 1 pc. Lamp Tester
- 1 pc. Instruction manual
- 1 pc. Battery 9V

### Order Information

Description	Cat. No.
HDT Lamp Tester	7100

## OPTIONS

Packaging	Gift Box	Sliding Blister
	4-color	4-color
	Neutral white	Neutral white
Instruction Manual	with specific customer data	